



Silmet Ltd

7500 Silistra

Bulgaria

ul. Tutrakan 4

tel./fax 086 831 117

silmet@mbx.contact.bg

<http://silmet.my.contact.bg>

Hinged steel belt

Application:

The main application of hinged steel belt is to equip the chip conveyors for bringing out the swarfs from the machine tool.


Transportation of small parts is possible with hinged steel belt

The hinged steel belt can be used in manufacturing processes with high temperature and in food-processing industry.

Execution

Standard execution – without any galvanic or chemical cover.

Options – oxidation, manufacturing from stainless steel.

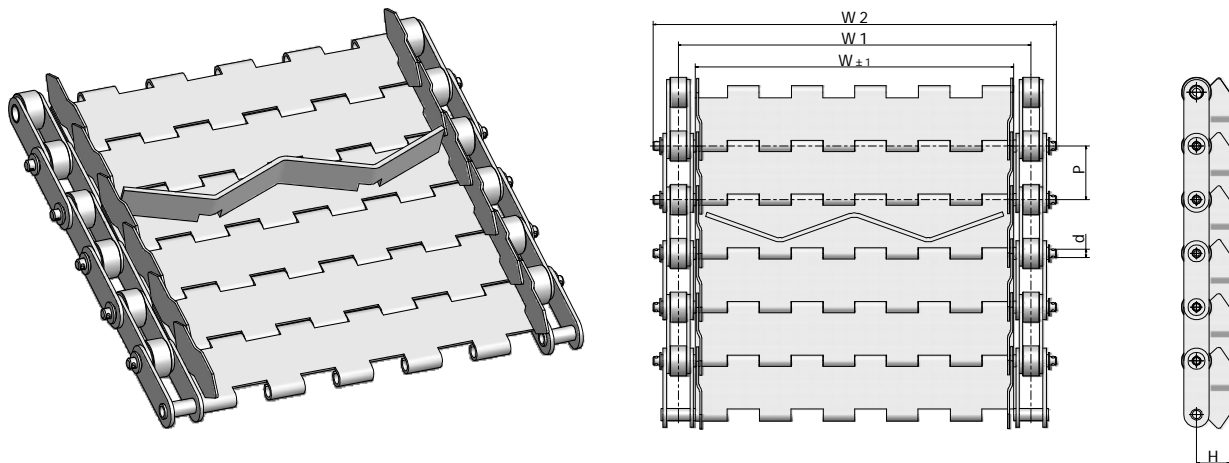

Dimensions

Parameter \ Type	31	38	50	63	63A
Pitch P , mm	31.75	38.1	50.8	63	63.5
Shaft diameter d <i>h11</i> , mm	5	6	8	8	10
Plate width W , mm	150, 200, 250	from 100 to 400 step 25 mm	from 120 to 480 step 30 mm	155, 230, 310, 465, 620	155, 230, 310, 465, 620, 775, 930
W 1 , mm	W+21	W+26	W+28	W+29	W+38
Total width W 2 , mm	W+55	W+65	W+70	W+72	W+95
Belt thickness	1.8	2	2	1.5	2.5
Height H , mm	23	23.5	31.5	36	38
Plate with rib	each 10th	each 9th	each 8th	each 7th	each 7th
Specification of the power chain	C2052HP	C2062HP	1650HP	TSL 2010-00	ZC27R-63.5

The producer keeps the rights to change dimensions provided in this catalogue.